Annex Creek/Salmon Creek Hydroelectric Project (FERC Project No. 2307)

Alaska Electric Light and Power Company

Juneau, Alaska

November 22, 2022

[This page intentionally left blank]

TABLE OF CONTENTS

1.	Introduction and Purpose	. 1
2.	Gage Operation	. 1
3.	Supplemental Valve Operation	. 7
4.	Supplemental Valve Release	.7
5.	Agency Consultation	. 8

LIST OF APPENDICES

Appendix A – Daily Discharge Table October 2016 - September 2022 Appendix B – Stream Rating Curve Appendix C – Plots of 15 Minute Data Appendix D – Salmon Creek Station Description and Analysis Water Year 2022 (Alaska Hydroscience) Appendix E – Agency Comments [This page intentionally left blank]

1. INTRODUCTION AND PURPOSE

In October 2015, Alaska Electric Light & Power Company (AELP) requested an amendment to its license that would allow the operation of the stream gage to be performed by the licensee. By Order issued December 30, 2015, the Federal Energy Regulatory Commission (FERC) approved the amendment and stipulated that a new stream flow plan be developed after consultation with Alaska Department of Fish and Game (ADFG), National Marine Fisheries Service (NMFS), and the United State Fish and Wildlife Service (USFWS). AELP prepared a plan in consultation with ADFG, NMFS, and USFWS, as well as with the Alaska Department of Natural Resources (ADNR) Water Division and National Weather Service (NWS).

By Order issued August 9, 2016 the FERC approved the stream flow monitoring plan with a requirement to file an instream flow monitoring report biannually to the FERC, NMFS, USFWS and ADFG with the requirement changing to an annual report after four successful biannual reports. The report is to review operation of the gage, identify when supplemental water was released and include information on the operation of the supplemental water valve. The report is to be submitted for agency review, with a 30day review and comment period, prior to filing with the FERC. Documentation of agency consultation should be included in the report.

The first report was submitted to FERC on April 19, 2017, the second report on August 16, 2017, the third on February 20, 2018 and the fourth on August 28, 2018. With the submission to FERC of the fourth report, AELP requested that the due date for the annual report be changed to December 1, 2019 to allow the entire water year to be analyzed in the report. This request was approved by FERC Order on October 9, 2018.

This is the fourth annual report, it covers the period since the last annual report submitted on November 15, 2021 and includes all of water year 2022.

2. GAGE OPERATION

The stream gage started operation on April 27, 2016, taking level measurements on a 15 minute basis. This data is automatically distributed to <u>www.aelp.com/About-Us/Salmon-Creek-Streamflow</u> where it is available for public display. The page has multiple graph options for quick review of the data. Real-time flow data is supplied directly to the AELP Supervisory Control and Data Acquisition (SCADA) System where it is logged and monitored. Alarms are automatically generated for low flow conditions or for loss of communication with the sensor.

The communication path between the gage and the AELP SCADA system is through an AT&T cellular phone modem intended to provide a stable communications path. This communication link is continuously monitored by the AELP SCADA system at the AELP dispatch center which is manned 24

hours per day. The operators are trained to respond to all alarms, either by taking direct action or calling a technical specialist who can resolve the specific problem.

The cellular modem proved very reliable in water year 2022, with one short failure occurring on July 17, 2022, from about 3:00pm to 8:00pm. No other failures occurred in water year 2022. Although the typical stream flow is well above the 9CFS action level and the stream flow doesn't change rapidly, the AELP Operator opens the valve for any loss of communication event and leaves the valve opened until communication is restored. This ensures that AELP remains in compliance with the license requirements.

Communication failures do not result in any data loss since the data is still stored locally on the datalogger, but it does result in a loss of real-time data to the AELP SCADA system.

Figures 1 through 4 below show the plots of daily mean discharge and field measured discharge for the period from October 1, 2021, to September 30, 2022. A total of seven discharge measurements were conducted to validate discharges from October 2021 through October 5, 2022. Calibration measurements ranged from 11.7 to 150 CFS.

Ed Neal with Alaska Hydroscience provided a new rating table for the stream on January 22, 2019, and the rating was continued in use, with slight shift adjustments, until a large peak discharge on Dec. 1, 2020. This large peak resulted in channel fill through the gage reach. Following that event, another rating was constructed based on seven discharge measurements and the highest recorded measurements conducted by the U.S. Geological Survey at this same site and gage datum. A copy of the new rating curve dated October 7, 2021, is included in Appendix B.

A table of the Daily Mean Discharge for the months of October 2016 through September 2022 is included in Appendix A.

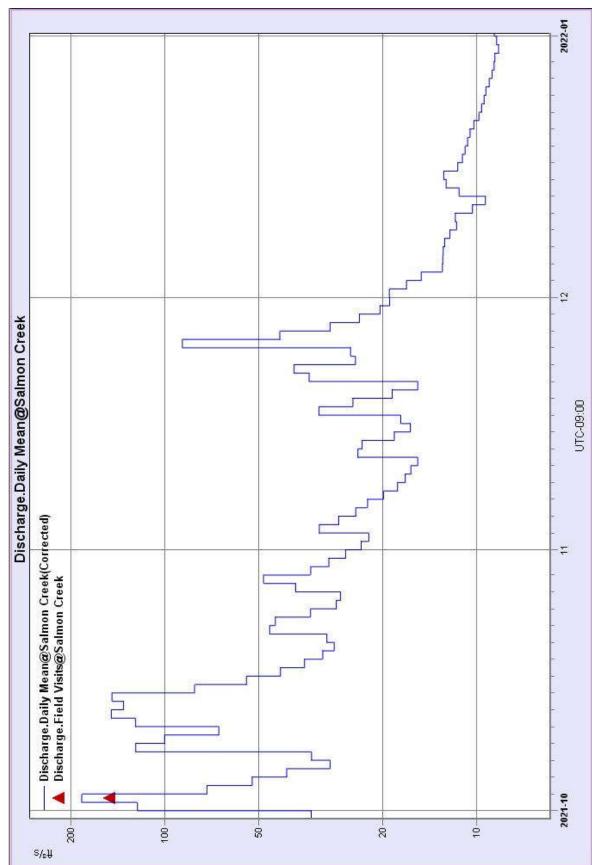



Figure 1 – Fourth Quarter 2021 Corrected Discharge

Annex Creek/Salmon Creek Hydroelectric Project FERC Project No. 2307

Page 3

November 2022




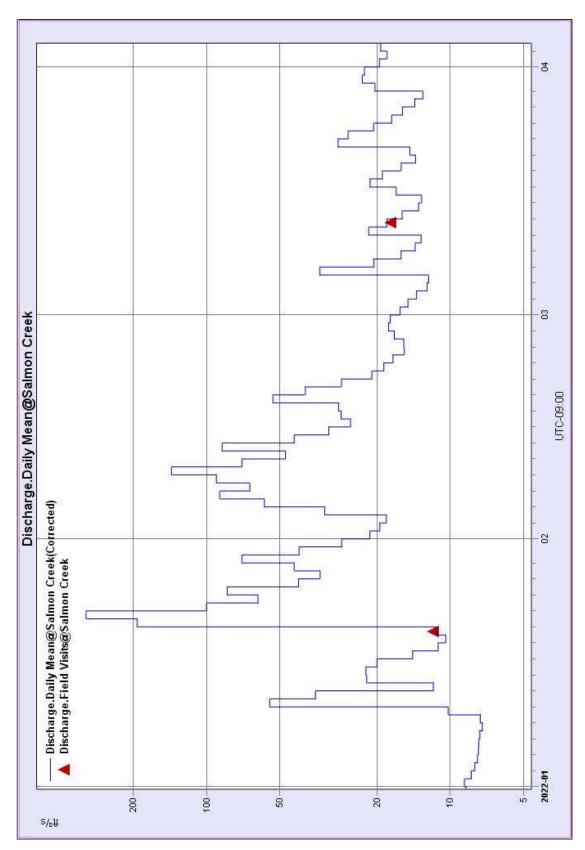

November 2022

Page 4




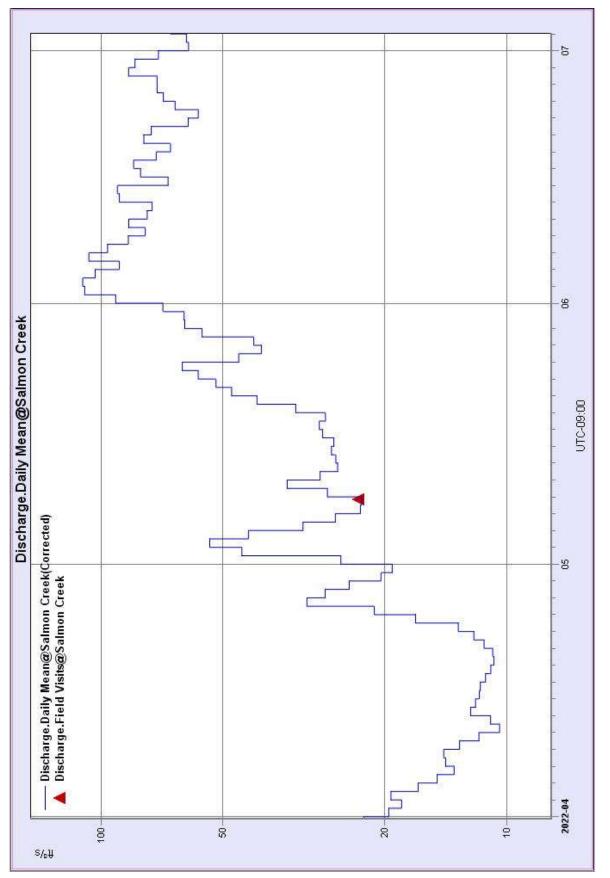

Page 5

November 2022



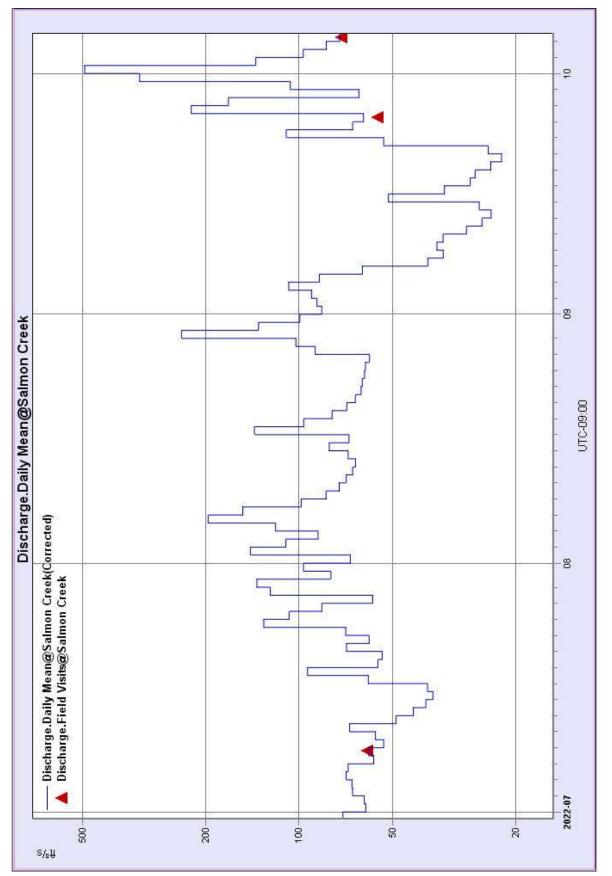

Page 6

November 2022

3. SUPPLEMENTAL VALVE OPERATION

The supplemental water valve is a 6" valve tapped off the penstock at the base of the dam. The valve discharges water directly into the natural drainage. Operation of the valve is performed remotely by the AELP System Operator who also has real-time indication of the streamflow. When the flow drops to 9CFS, an alarm is generated, and the Operator opens the valve and logs the operation.

The valve is either open or closed, there are no intermediate positions. The Operator has feedback on the valve position, provided by limit switches which show the valve position as well as an analog signal which reflects valve position. In addition to valve position, there is a flowmeter on the outlet of the valve. The amount of flow through the valve when open varies with the reservoir elevation. At a higher elevation there is more flow and at a lower elevation the flow is less. The valve has been sized to ensure a minimum of 3CFS of flow at minimum reservoir elevation, so typically more than 3 CFS is discharged to the stream.

4. SUPPLEMENTAL VALVE RELEASE

Water year 2022 began with slightly higher than normal levels of precipitation in fall, with cooler temperatures bringing more snow and a later thaw than the previous water year. Due to higher-thannormal precipitation and rapid melt in the spring, the supplemental valve was not used to compensate for low streamflow levels after April but was used once in August in accordance with the Outlet Release Plan to help reduce the elevation of the Salmon Creek Reservoir. The table below shows operations of the supplemental valve for the period since the last annual report.

Station service at the valve house located at the base of the dam is provided by a small hydroelectric DC generator. This power is used for monitoring, valve operation, and battery charging. The output of the turbine is discharged into the stream at the base of the dam, which increases the flow into the natural drainage. During the low flow periods, the stream flow in Salmon Creek was stable due to the consistent releases through the supplemental valve and the hydroelectric turbine output.

Date	Time	Action	Release Flow (CFS)
12/12/2021	20:52	OPEN	4.2
12/13/2021	22:31	CLOSED	4.2
12/14/2021	19:37	OPEN ⁽¹⁾	4.1
12/15/2021	17:20	CLOSED	4.1
12/15/2021	19:27	OPEN ⁽¹⁾	4.1
1/11/2022	15:42	CLOSED	4.1
4/12/2022	04:40	OPEN	4.1

4/25/2022	14:45	CLOSED	3.9
7/17/2022	11:59	OPEN ⁽²⁾	4.3
7/17/2022	02:31	CLOSED	4.3
8/2/2022	00:47	OPEN ⁽³⁾	4.4
8/2/2022	11:38	CLOSED	4.4

(1) Valve opened due to freezing of stream gage, not a low flow condition.

(2) Valve opened due to communication failure to stream gage, not a low flow condition.

(3) Valve opened due to reaching action level 1135' in Outlet Release Plan, not a low flow condition.

5. AGENCY CONSULTATION

A copy of the report with a request for consultation was sent out on October 20, 2022, by Steve Vorderbruggen with AELP to ADFG, USFWS and NMFS by e-mail.

A copy of the request for consultation and comments received are included in Appendix E.

APPENDIX A: DAILY DISCHARGE TABLE OCTOBER 2016-SEPTEMBER 2022

[This page intentionally left blank]

Alaska Electric Light and Power Co.

Identifier: Discharge.Daily Mean@Salmon Creek	Salmon Creek Juneau	ftv3/s	None	
Identifier:	Location:	Units:	Filter:	
		Salmon Creek		

	Sep	150	96	59	120	76	56	75	80	140	120	72	57	46	39	34	31	32	27	23	21	20	27	31	89	50	74	150	130	60	41		67	20	150
	Aug S	21	19	18	17	16	15	14	13	12	12	12	14	16	ŝ	80	69	130	110	73	73	110	150	75	51	89	95	70	55	43	42	100	51	12	150
	Jul	63	92	110	70	52	47	40	36	54	46	49	46	69	82	54	57	46	37	33	29	27	37	39	30	27	35	76	48	35	29	24	49	24	110
560	Jun	64	62	57	46	45	59	89	78	67	48	39	37	36	8	35	51	77	49	45	ß	43	42	37	42	40	37	41	36	34	50		48	33	78
Max:	May	34	37	39	32	27	25	25	34	69	42	46	55	50	49	43	44	48	49	81	81	300	150	94	73	59	28	52	47	61	8	62	62	25	300
n: 8.2	Apr	34	21	16	13	17	17	14	13	19	16	16	18	22	20	18	18	17	16	13	12	13	18	22	25	32	ß	41	62	38	29		22	12	62
39 Min:	Mar	12	12	12	11	11	11	11	10	10	10	9.8	9.6	9.4	9.2	σ	8.7	8.6	8.4	8.3	8.3	8.2	8.2	8.3	8.2	8.2	8.2	8.6	12	16	13	42	11	8.2	42
Aggr: 3	Feb	11 Ef	12	11	11	12	13	12	11	10	11	19	31	23	74	77	43	27	21	17	15	14	13	12	11	11	12	13	13				21	10	77
	Jan	12	12	12	11	11	11	9.9	9.5	σ	8.6	8.3	8.8	16	43	45	130	55	29	34	22	17	15	14	15	23	22	27	ŝ	25	18	15	23	8.3	130
	Dec	19	67	86	38	25	20	19	17	15	14	13	14	16	15	14	13	15	17	19	20	24	15	12	11	10	12	13	15	11	11 E	12	21	10	<mark>8</mark> 6
2017	Nov	11	12	24	ŝ	59	31	27	51	64	76	120	95	65	8	43	R	27	23	20	18	16	16	16	15	14	14	14	ξ	27	80		36	11	120
Year: Oct. 2016 to Sept. 2017	Oct	25	22	20	19	17	16	15	14	13	13	12	12	12	11	11	12	17	37	32	31	23	26	25	19	16	15	14	13	12	12	11	18	11	37
Year: Oct.	Day	1	2	m	4	S	9	7	00	σ	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	Aggr	Min	Max

November 2022

Page 11

Identifier: Discharge.Daily Mean@Salmon Creek Location: Salmon Creek Juneau Units: ft^3/s

None

Filter:

Salmon Creek - Daily Mean Discharge

	\$	8	27	23	20	18	16	15	14	đ	12	11	11	10	9.9	9.5	9.5	12	12	11	11	11	16	12	18	32	18	14	12	11		16	9.5	43
Sep	12	11	7	12	11	1	14	23	0	m	0	2	66	0	00	28	9	1	18	16	16	21	23	26	57	35	36	96	50	34	43			
Aue		1	9.7	1	1	11	1	2	100	5	8	2	m	100	m	2	2	2	1	1	1	2	2	2	5	m	m	6	5	m	4	8	9.7	100
Int		24	23	21	20	18	17	15	14	16	20	20	16	15	32	100	40	28	24	20	18	17	15	14	13	12	11	11	10	9.5	9.9	21	9.5	100
or z		31	29	R	35	31	31	29	26	ŝ	8	32	29	31	27	28	44	40	35	R	31	25	21	20	18	19	20	18	30	39		30	18	44
Mav		50	28	56	100	71	54	8	8	64	79	110	75	56	37	31	80	36	39	41	77	85	49	43	42	99	69	51	42	37	34	55	28	110
Abr	8.7	8.6	8.5	8.3	8.3	8.4	8.7	9.9	18	22	21	16	15	15	14	13	12	16	28	20	14	15	49	41	27	36	36	24	19	17		19	8.3	49
Mar	8.6		8.2	00	7.8	00	7.8	7.9	7.9	8.1	12	16	25	22	16	15	14	12	14	16	13	11	11	9.8	6 .9	10	10	9.9	9.5	9.1	8.8	11	7.8	25
Feb 20	14	14	13	13	12	11	11	10	9.4	9.1	9.7	10	10	10	6 .9	9.8	9.6	9.5	9.3	9.2	σ	8.9	8.9	8.7	8.7	8.4	8.4	8.3				10	8.3	14
an Ian	9	25	48	41	45	35	28	18	16	15	13	18	20	57	8	50	35	26	22	20	17	16	15	16	17	16	16	15	15	15	15	25	10	8
Dec	11	10	11	27	20	24	25	52	120	72	200	95	130	210	8	70	52	38	31	28	24	21	19	18	17	16	15	14	14	12	11	48	10	210
lov	42	35	32	29	26	24	22	20	19	17	16	15	14	13	12	11	11	11	11	10	10	10	10	9.9	9.5	9.2	9.2	9.1	12	18		17	9.1	42
Dav Oct ADT Joph: 2018	8	28	68	35	41	75	47	60	60	40	31	26	23	24	42	49	40	32	27	35	8	27	37	37	28	57	560	110	61	52	54	59	23	560
Dav	╞	2	m	4	2	9	7	00	<u>Б</u>	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	Aggr	Min	Max

November 2022

Page 12

Discharge.Daily Mean@Salmon Creek	Salmon Creek Juneau
Identifier:	Location:

ft^3/s None

Units: Filter:

ischarge
y Mean D
ek - Dail
almon Cre
S

		9	14	20	14	12	10	12	11	<mark>1</mark> 0	10	9.8	10	29	23	đ	12	12	18	R	330	340	66	67	170	130	94	57	41	R	34	-	56	9.8	340
Sep		7	12	11	10	9.9	9.5	9.2	8.7	8.3	8.1	7.8	7.7	7.5	7.4	7.7	7.4	13	10	8.6	7.9	7.6	9.5	21	27	35	32	52	26	17	13	11			
Alle						6	6	6				2	2	2	-	2	2				-	2	6					-					14	7.4	5
Int		ţ	t	13	12	12	11	E	14	14	E	ε	12	12	12	11	13	12	14	13	14	12	11	11	11	11	14	15	40	19	13	12	14	11	
all a		ñ	36	31	37	31	26	27	28	35	32	81	54	36	29	õ	45	52	69	45	34	32	ß	28	25	22	21	24	22	17	16		34	16	;
Mav		t.	17	26	31	44	78	130	120	110	71	52	37	33	31	37	40	46	41	38	39	48	41	35	31	31	40	43	41	33	ß	35	47	14	
Apr		9	15	15	16	14	13	14	19	18	20	17	17	15	13	12	12	13	45	39	24	19	26	25	20	17	16	14	13	13	13		18	12	;
Mar	ł	<u>ν.</u> ν	9.2	8.9	8.8	8.7	8.5	8.4	8.3	8.4	9.1	9.4	9.5	10	11	11	15	29	76	45	38	40	41	42	35	27	22	20	19	18	17	16	21	8.3	ł
Feb 32		ų	18	16	16	16	16	15	15	15	14	14	13	13	12	12	11	11	11	11	11	11	10	10	9.8	9.6	9.6	9.6	9.6				13	9.6	;
lan I		170	20	29	21	20	18	18	18	17	14	15	15	35	61	8	26	21	18	16	15	16	15	13	16	47	160	55	35	33	35	30	33	13	
Der		2	18	17	17	16	15	14	16	õ	42	56	32	25	20	18	18	25	24	31	23	19	17	16	15	14	1 3	16	16	14	£	23	21	13	
lov	8	52	22	20	19	17	16	15	22	34	27	64	40	46	58	38	30	79	110	8	70	50	37	31	27	26	37	32	26	24	22		38	15	
N		л Л	9.3	11	12	16	17	14	28	19	16	26	19	28	160	190	81	100	56	71	56	42	47	46	37	49	44	68	31	27	31	27	44	m	
Dav Oct And April 2013	5																																4	9.3	
Dav	Ì,	-	2	m	4	S	9	7	00	σ	10	11	12	đ	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	80	31	Aggr	Min	

November 2022

ç	(
	, () .		
(
			2
		_	
•	ç		
		1	
<	<	1	

Discharge.Daily Mean@Salmon Creek	Salmon Creek Juneau	ft^3/s
Identifier:	Location:	Units:

×
e a
e
ō
-
0
č
<u>_</u>
9
S
5
\geq
-
2
8
3
01
60
1
Å,
5
S
-
m
ũ
Ś
-
~
100
õ

None Filter:

Day	Oct	Nov	Dec	Jan	feb		Mar	Apr	May	Jun	lut	A	Aug	Sep
	270	51	25		56	11	18	7.4		84		40	46	
	160	47	47		35	12	17	7.2	2 46	83		55	44	
	70	49	29		26	13	15	7.4		110		51	73	
	49	61	23		21	13	12	7.2	2 64	83		55	120	
	62	51	24		18	15	11	7.1		60		45	59	
	590	44	23		17	12	12	7.2	2 46	53		36	41	
	86	79	19		16	11	12		7 48	82		8	83	
	52	45	21		15	14	12	8.3		93		45	120	
	40	31	21		13	13	14	7.8				61	170	
10	8	26	23		12	89	11	7.4	-1			56	260	
11	99	25	26		12	32	11	7.3				42	140	
12	8	24	23		12	23	11	7.4		61		41	110	
13	41	44	20		12	18	9.7	8.5		99		36	100	
	32	67	18		12	14	9.1	17		93		83	86	
15	34	99	16		12	13	10	19		61		61	110	
	38	100	15		12	11	9.8	21	6 70	70		41	100	
17	33	270	14		12	12	9.5	32		69		36	110	
18	39	68	16		12	13	9.4	M		88		79	66	
	37	60	16		12	13	9.2	m	68 69	96		110	87	
	31	180	15		12	16	9.2	4	4 100	120		190	81	
	26	190	13		11	21	9.1	68	8 67	87		85	80	
	23	210	13		11	14	9.4	130	0 59	68		55	76	
	62	120	18		15	11	6	100	0 62	60		40	78	
24	99	74	16		15	12	8.7	65	5 100	56		41	86	
	46	52	17		15	13	8.6	2	2 87	60		93	91	
26	34	39	41		27	17	80.00	55	5 72	110		300	73	
27	31	31	27		17	õ	8.8	9	3	72		130	47	
	25	27	43		12	29	8.3	9	2 48	60		99	44	
29	33	24	29		30	19	7.8	78	58	68		53	39	
30	41	22	120		17		7.5	7	0 61	52		49	61	
31	32		72		13		7.5		61			43	61	
Aggr	72	74	27	17		18	10	36	70	75	70	_	91	35
Min	23	22	13	11		11	7.5	7	46	52	33		39	14

November 2022

Page 14

Daily Mean Discharge 2021 WY Salmon Creek

Identifier: Discharge.1@Salmon Creek

Location: Salmon Creek Juneau

Units: ft^3/s

Filter: None

		3	ę	74		Jul Aug	Sep
		:	Щ :	74	320	94	
	34 30 34 30	14	11	50 47	250	68 28	28 48 25 63
		Ξ.	11	8	150	8	
		13	13	59	110	86	
	38 29	14	11	60	100	68	33 54
	37 28	12	12	80	91	83	35 44
	37 28	11	11	73	8	85	
	36 27	11	12	72	86	90	
	46 26	11	10	60	88	81	69 46
	54 26	11	9.8	69	78	75	
	56 25	10	11	67	71	130	81 66
	46 24	9.6	18	59	69	150	350 65
	42 24	9.6	31	91	72	170	110 63
	74 24	9.7	23	130	170	100	120 71
	60 25	11	8	91	110	88	87 72
	74 26	14	49	60	85	90	81 53
	120 26	11	8	50	8	84	110 41
	100 28	11	89	50	76	75	
	60 28	10	62	52	110	72	77 38
	49 41	9.9	51	99	180	74	
	44 30	9.6	39	120	92	64	65
	41 19	12	32	120	74	45	
	39 11	12	32	78	250	44	47 100
	37 11	11	R	65	190	40	
	35 11	11	36	65	180	32	30 42
	32 12	13	35	59	140	30	31 37
	32 30	12	29	56	130	29	95 35
	32	10	61	8	120	27	
	32	12	84	95	110	28	49 34
	31	23		350		32	8
47	47 25	12	31	81	130	76 6	69 54
30		0	9.5	39	6	24 24	23 30
230	30 9.5	t:n					

Annex Creek/Salmon Creek Hydroelectric Project FERC Project No. 2307

November 2022

Page 15

5

Daily Mean Discharge 2022 WY Salmon Creek

ft^3/s None Units: Filter:

Salmon Creek Juneau

Location:

		2022 Marci 1201											
	Day	oct	Nov	Dec	Jan	Feb	Mar	Apr	May	nn	Int	Aug	Sep
	1	120	23	19	8.7	21				92	9		84
	2	180	22	17	8.2	1				110	3	140	87
	m	73	32	15	7.9	18				110	6	110	91
	4	52	28	13	7.7	×				100	6	87	110
	u	41	24	13	7.7	33				6	70	120	86
	9	29	22	13	7.6	8				110	99	200	62
	7	34	20	13	7.6	66				<mark>96</mark>	6		38
	00	120	18	12	7.4	9				86	90		34
	ŋ	100	17	12	7.5	140				78	8		36
	10	67	16	12	10	11				85	6		34
	11	120	15	10	55	4				77	99		29
	12	150	24	9.3	36	8				75	4		26
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	13	140	23	11	12	4				<mark>6</mark>	4		24
	14	150	18	12	22	m				91	ŝ		26
1 1 1 2 2 1 1 2 2 1 1 2 3	15	8	16	13	22	26				89	m		51
42 32 11 14 23 11 14 23 13 14 23 14 23 14 23 14 23 60 31 13 13 11 11 13 13 13 14 11 23 54 31 13 13 130 13 13 14 11 41 73 54 30 34 10 130 21 14 11 41 73 54 31 24 26 310 11 12 12 12 54 4 24 23 310 11 26 71 56 31 26 31 27 26 12 26 71 32 29 32 29 31 26 71 33 29 32 28 41 27 26 130 31 29	16	55	17	11	20	28				80	m		34
36 25 11 11 53 16 73 73 73 73 73 73 73 73 73 73 73 75<	17	42	32	11	14	25				8	90		
31 10 11 10 30 16 31 67 66 36 29 15 10 11 28 11 28 14 78 56 30 34 10 110 21 12 11 41 78 56 46 38 9.8 310 117 22 11 48 75 56 46 78 79 71 72 71 75 73 46 73 9 16 11 15 16 71 56 71 57 9 71 71 71 71 73 73 58 9 16 71 71 73 74 73 58 9 71 71 73 74 73 73 58 9 58 71 73 74 73 73 50 58	18	36	25	11	11	13				73	9		
29 15 10 11 28 14 11 41 78 54 30 33 93 310 139 231 135 75 75 75 46 38 93 310 130 131 26 75 76 75 44 24 75 93 10 11 26 130 75 75 34 126 126 127 216 121 71 76 71 76 38 93 93 126 131 127 126 71 76 71 38 93 34 116 71 72 76 71 76 71 38 128 128 128 128 128 72 72 73 73 74 39 128 128 128 128 128 72 73 73 74 46 </td <td>19</td> <td>31</td> <td>19</td> <td>11</td> <td>10</td> <td>×</td> <td></td> <td></td> <td></td> <td>67</td> <td>3</td> <td></td> <td></td>	19	31	19	11	10	×				67	3		
30 34 10 190 21 10 190 21 10 61 75 70 44 24 24 26 310 11 26 120 61 70 71 44 24 24 26 100 17 26 130 71 56 71 56 71 24 25 99 10 17 26 130 66 130 27 28 99 10 16 16 16 71 56 130 27 28 99 14 18 14 18 14 16 16 10 <td< td=""><td>20</td><td>29</td><td>15</td><td>10</td><td>11</td><td>28</td><td></td><td></td><td></td><td>78</td><td>ų</td><td></td><td></td></td<>	20	29	15	10	11	28				78	ų		
	21	30	34	10	190	21				75	70		
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$	22	46	38	9.8	310	11				61	5		
34 25 9,4 61 15 21 17 63 66 130 28 9,3 88 9,3 82 17 16 70 110 27 23 9,1 42 17 16 71 21 46 70 28 9,1 42 17 16 31 40 73 84 28 23 13 14 18 14 73 84 73 84 31 148 74 18 13 24 73 84 73 84 31 13 22 13 24 74 74 73 74 32 8 44 18 12 74 72 73 74 31 26 11 42 23 16 73 74 180 8 7.4 18 16 70 70 74 74 </td <td>23</td> <td>44</td> <td>24</td> <td>9.6</td> <td>100</td> <td>Ħ</td> <td></td> <td></td> <td></td> <td>28</td> <td>12</td> <td></td> <td></td>	23	44	24	9.6	100	Ħ				28	12		
28 93 82 16 17 21 46 70 110 27 43 91 42 17 16 17 23 84 70 110 28 23 91 42 17 16 17 73 84 38 23 14 18 14 28 84 73 84 38 23 12 14 18 13 24 73 84 30 13 22 23 13 24 13 140 74 73 94 74 31 26 11 42 18 12 12 140 70 72 74 180 85 7.4 18 16 70 16 70 97 180 85 7.4 18 16 16 70 97 97 180 85 7.4 15 12	24	34	25	9.4	61	Ħ				99	130		
27 43 91 42 17 16 31 40 73 84 38 229 8.9 38 34 18 14 28 42 73 84 48 23 24 18 14 18 14 28 42 58 58 34 23 19 20 87 24 28 42 73 58 120 30 30 19 8.5 42 18 12 16 60 72 73 58 4 23 7.4 18 22 12 24 70 72 73 56 26 11 42 18 16 70 70 70 70 70 180 88 7.4 140 34 34 70 140 70 70 70 70 70 70 70 70 70 70 70	25	28	88	9.3	82	16				70	110		
38 29 8.9 34 18 14 28 42 78 59 58 59 58 59	26	27	43	9.1	42	Ħ				73	ò		220
48 24 18 44 18 13 24 56 85 120 34 20 8.7 772 72 72 87 140 120 120 120 120 140 120 14	27	ŝ	29	8.9	34	11				73	25		
34 20 8.7 72 72 20 62 82 140 30 19 8.5 42 23 19 62 72 79 26 26 11 42 23 19 62 72 79 26 26 11 42 28 16 70 70 97 180 85 7.4 15 12 16 40 82 70 96 180 88 19 310 140 34 31 70 140 240 240	28	48	24	8.8	44	18				85	120	100	64
30 19 8.5 42 23 19 62 72 79 26 28 8.6 28 28 70 70 97 66 26 11 42 41 18 16 70 97 180 85 7.4 15 12 10 23 58 70 180 88 19 310 140 34 31 70 140 240	29	34	20	8.7	72		3			82	140	240	110
26 8.6 28 27 97 97 97 97 97 96	90 M	8	19	8.5	42		2			72	22	130	330
66 26 11 42 41 18 16 40 82 70 26 15 8.5 7.4 15 12 10 23 58 37 180 88 19 310 140 34 31 70 110 140 2	31	26			28		2	2	70		6	66	
26 15 8.5 7.4 15 12 10 23 58 37 180 88 19 310 140 34 31 70 110 140 2	Aggr	99	26	11	42	41	18	16	40	82	70	9 6	72
180 88 19 310 140 34 31 70 110 140	Min	26	15	8.5	7.4	15	12	10	23	28	37	59	22
	Max	180	8	19	310	140	34	31	70	110	140	240	330


Annex Creek/Salmon Creek Hydroelectric Project FERC Project No. 2307

Page 16

November 2022

APPENDIX B: STREAM RATING CURVE

[This page intentionally left blank]

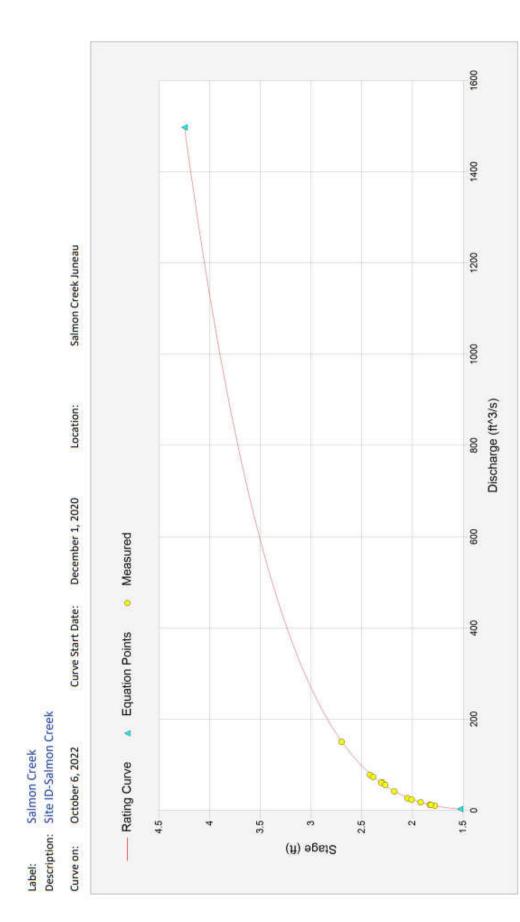

November 2022

Page 19

O
S
ver
Pov
p
and
-
Ligh
. <u> </u>
ctric
a
ш
ŝ
askä
7

				-
÷				
ENC				
AG				
SCE				
SOURCE AGENCY:		min		
		ad		
		B		
	LONGITUDE -123.11	Date Processed: 2021-10-11 08:18:25 UTC-09:00 By admin	arge (ft^3/s)	「「「「「「」」「「」」「「」」」「「」」」」「「」」」」」」」」」」」」
STATION NUMBER Salmon Creek Salmon Creek Juneau	LATITUDE 49.28	Date Processed: 2021-	Rating for Discharge (ft^3/s)	

07 18:23:19 [UTC], Update	created by admin on 2021-10-07 18
---------------------------	-----------------------------------

Offset1:	0.98			Kemarks:	: EXPANDED	CAQRati	EXPANDED CAQRating TABLE					
Stage (m)					Dischar	Discharge (ft^3/s)	(5/8					DIFF IN O PER
		00.	10.	.02	.03	.04	.05	90.	.07	.08	60.	.1 UNITS
1.50					2.560*	2.730	2.909	3.095	3.290	3.494	3.706	1.954
1.60		3.928	4.159	4.400	4.651	4.912	5.183	5.465	5.758	6.061	6.377	2.776
1.70		6.704	7.042	7.393	7.757	8.133	8.522	8.924	9.340	9.769	10.21	3.966
1.80		10.67	11.14	11.63	12.13	12.65	13.18	13.73	14.30	14.88	15.48	5.430
1.90		16.10	16.73	17.39	18.06	18.74	19.45	20.18	20.92	21.69	22.47	7.180
2.00		23.28	24.10	24.95	25.82	26.71	27.62	28.56	29.51	30.49	31.49	9.240
2.10		32.52	33.57	34.64	35.74	36.86	38.01	39.19	40.39	41.61	42.87	11.630
2.20		44.15	45.45	46.79	48.15	49.54	50.96	52.41	53.89	55.40	56.93	14.350
2.30		58.50	60.10	61.73	63.40	65.09	66.82	68.58	70.37	72.19	74.06	17.450
2.40		75.95	77.88	79.84	81.84	83.88	85.95	88.06	90.20	92.38	94.60	20.910
2.50		96.86	99.16	101.5	103.9	106.3	108.7	111.2	113.8	116.4	119.0	24.740
2.60		121.6	124.3	127.1	129.9	132.7	135.6	138.5	141.5	144.5	147.6	29.100
2.70		150.7	153.8	157.0	160.3	163.6	166.9	170.3	173.8	177.3	180.8	33.700
2.80		184.4	188.0	191.7	195.5	199.3	203.2	207.1	211.0	215.0	219.1	38.800
2.90		223.2	227.4	231.7	236.0	240.3	244.7	249.2	253.7	258.3	263.0	44.500
3.00		267.7	272.4	277.3	282.1	287.1	292.1	297.2	302.3	307.5	312.8	50.400
3.10		318.1	323.5	329.0	334.5	340.1	345.8	351.5	357.3	363.2	369.1	57.000
3.20		375.1	381.2	387.3	393.5	399.8	406.2	412.6	419.1	425.7	432.3	64.000
3.30		439.1	445.9	452.7	459.7	466.7	473.8	481.0	488.3	495.6	503.0	71.400
3.40		510.5	518.1	525.8	533.5	541.4	549.3	557.3	565.3	573.5	581.7	79.600
3.50		590.1	598.5	607.0	615.5	624.2	633.0	641.8	650.8	659.8	668.9	88.000
3.60		678.1	687.4	696.8	706.3	715.8	725.5	735.3	745.1	755.1	765.1	97.100
3.70		775.2	785.5	795.8	806.2	816.8	827.4	838.1	848.9	859.9	870.9	106.800
3.80		882.0	893.3	904.6	916.0	927.6	939.2	951.0	962.8	974.8	986.8	117.000
3.90		0.999	1011	1024	1036	1049	1062	1074	1087	1100	1114	128.000
4.00		1127	1140	1154	1167	1181	1195	1209	1223	1237	1251	139.000
4.10		1266	1280	1295	1310	1325	1340	1355	1370	1386	1401	151.000
4.20		1417	1433	1449	1465	1481						

Annex Creek/Salmon Creek Hydroelectric Project FERC Project No. 2307

Page 20

November 2022

Comments

Aging 0

2020-12-01 16:00:00 [UTC-09:00]

104e 8

Starting Date

Ending Date


"*" indicates a rating descriptor point

APPENDIX C: PLOTS OF 15 MINUTE DATA

FOURTH QUARTER 2021 – THIRD QUARTER 2022

[This page intentionally left blank]

Figure C1 – Fourth Quarter 2021

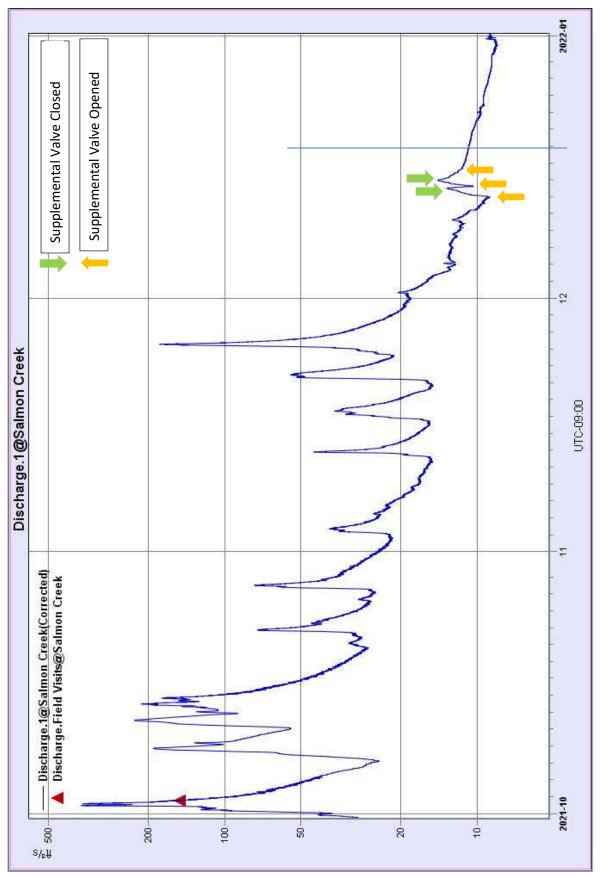


Annex Creek/Salmon Creek Hydroelectric Project FERC Project No. 2307

Page 23

November 2022

Figure C2 – First Quarter 2022

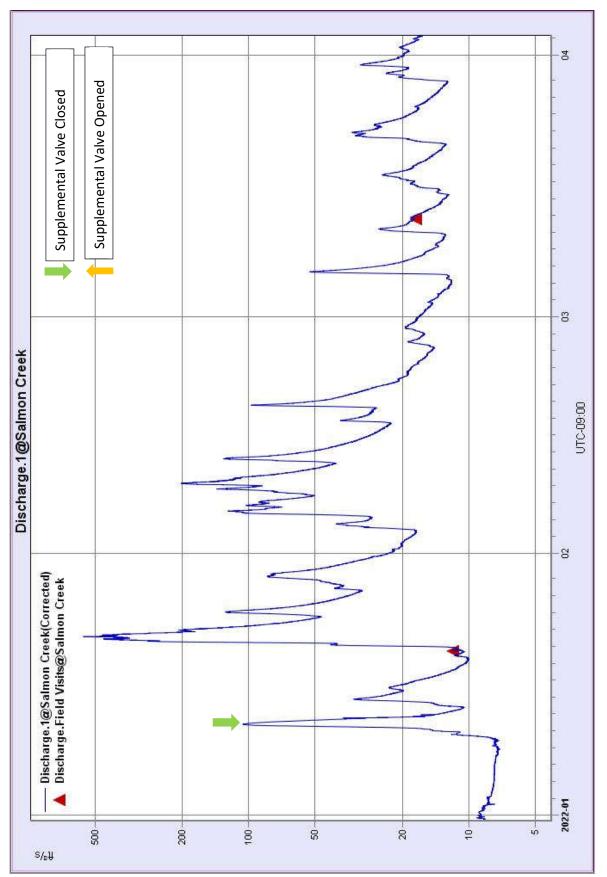


November 2022

Page 24

Annex Creek/Salmon Creek Hydroelectric Project

FERC Project No. 2307

Figure C3 – Second Quarter 2022

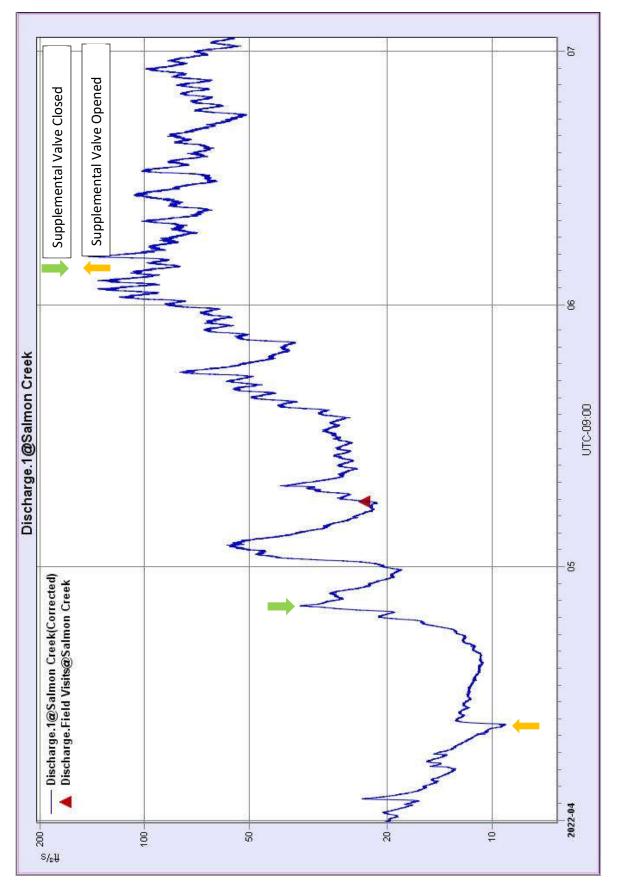


November 2022

Page 25

Annex Creek/Salmon Creek Hydroelectric Project

FERC Project No. 2307

Figure C4 – Third Quarter 2022

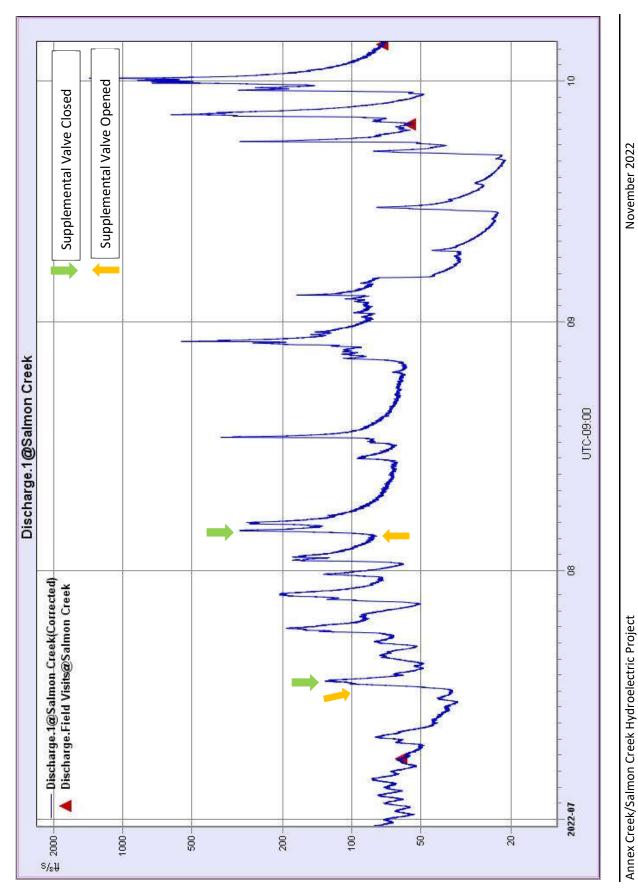

Page 26

FERC Project No. 2307

APPENDIX D: SALMON CREEK STATION DESCRIPTION AND ANALYSIS WATER YEAR 2022 (ALASKA HYDROSCIENCE)

[This page intentionally left blank]

Salmon Creek Gaging Station near Juneau, Alaska

Station Description for the 2022 Water Year

LOCATION.—Lat 58°19'57", long 134°27'57" referenced to North American Datum of 1927, and Lat 58°19'56", long 134°28'04" referenced to World Geodetic System 1984. Gage is located on the left bank (when facing downstream), about 0.3 mi upstream from the mouth and 2.5 mi northwest of Juneau.

DRAINAGE AREA.—Drainage area 9.69 mi² (reported by the USGS), discharges are regulated.

ESTABLISHMENT AND HISTORY.—Gage established on April 27, 2016 at the same location and datum of U.S. Geological gaging station number 15051010.

GAGE.—A Campbell Scientific CS450 vented and temperature compensated transducer is coupled to a Campbell Scientific CR6 data logger and records stage data in 15 minute intervals. The transducer is housed in 1 inch galvanized pipe and is set and referenced to vertical datum established by the U.S. Geological Survey (see reference marks). Additional equipment is housed in a gage house on left bank.

CONTROL.—Low flow control is a boulder/cobble riffle immediately below the orifice and staff gage. The channel is the control at medium and high stages. Shifting from the rating is possible at all stages as the gage reach can be alternately scoured and filled.

DISCHARGE MEASUREMENTS.—Measurements are made by wading in the vicinity of the gage. High flow measurements can be measured from a bridge approximately 0.25 mi downstream.

FLOODS.—U.S. Geological Survey recorded a maximum discharge of 2110 ft³/s, Nov. 22, 2005 and gage height 4.20 ft. Minimum discharge recorded by the U.S. Geological Survey was 3.5 ft³/s, March 17-20, 2006. The maximum gage height of 4.20 ft was also attained on Dec. 1-2, 2020 just prior to the transducer being damaged by the high-flow event.

WINTER FLOW.—The stage-discharge relationship will be periodically affected by ice during cold periods during most winters.

REGULATION AND DIVERSIONS.—Flow is regulated by Salmon Creek Reservoir located 2 miles upstream. Diversion upstream for off-stream hydropower plant; outflow from the plant goes into Gastineau Channel and is not included in the discharge records. There is a supplemental water valve tapped off of the penstock at the base of the dam to supply additional water to Salmon Creek during periods of low flow. The valve discharges water directly into the natural channel. Operation of the valve is performed remotely by the AEL&P System Operator who also has real-time indication of the streamflow. When the flow drops to 9 ft³/s, an alarm is generated and the Operator opens the valve and logs the operation.

ACCURACY.— Accuracy of the discharge records should be fair to good with the exception of ice affected record which will be fair to poor.

REFERENCE MARKS.—The gage is referenced to several vertical reference marks (RMs) established by the U.S. Geological Survey to accurately track vertical datum for the gage. The existing gage continues to reference these RMs to maintain accurate vertical datum. In a survey conducted on July 3, 2020 additional reference marks were added to the station to facilitate accurate tracking of station datum.

RM 1 – Brass cap anchored in concrete 2 feet shoreward of the orifice on left bank, elevation 2.64 feet. This RM is the base RM from which to begin level surveys.

RM2-- Established July 3, 2020. Head of rock bolt protruding from top of boulder 3 feet upstream from RM1, elevation 4.87 feet.

RM3—Established July 3, 2020. 3/8 in anchor bolt in on top of 5-foot boulder located approximately 15 feet upstream near the left edge of water, elevation 3.77 feet.

RP $1 - \frac{1}{4}$ inch anchor bolt drilled in concrete block 1 foot upstream of orifice, elevation 2.44 feet.

RM 5 – $\frac{1}{2}$ inch lag bolt on upstream side of two-foot diameter cottonwood 25 feet from left edge of water and 12 feet downstream of the orifice, elevation 8.59 feet.

RM5.1-- Established July 3, 2020. Lag bolt on upstream side of 26-inch cottonwood tree on left bank 25 feet shoreward and 12 feet downstream of orifice, elevation 8.70 feet. Replacing RM5, which was nearly grown over by bark.

RM 6 – $\frac{1}{2}$ inch lag bolt on upstream side of 1-foot diameter spruce tree, 15 feet from the left edge of water and 15 feet upstream of the orifice, elevation 7.77 feet.

RM6.1- Established July 3, 2020. Lag bolt on same tree as RM6, elevation 8.02 feet. Used to replace RM6, which is nearly overgrown.

2022 WATER YEAR STATION ANALYSIS

GAGE HEIGHT RECORD.— Gage height record is complete for the 2022 water year with no periods of missing record. The gage height record was periodically subject to backwater due to ice during which times discharges were estimated. Gage height record was subject to backwater from ice during the following dates:

December 13-22; December 24-29, 2021, Jan. 1, Jan. 3-8, Jan. 10-12, 2022.

GAGE HEIGHT CORRECTIONS.— Pressure transducers used to record stage are often subject to slight drift in recorded values. Gage height corrections to the recorder are used to adjust for differences between the recorded values and readings of the outside reference gage during site visits. Gage height corrections are typically prorated over time between site visits. Corrections less than +/- 0.02 feet are typically not applied unless they persist over multiple site visits. Gage height corrections for the 2022 water year ranged from no correction to +0.02 ft. A plot of corrected gage height and measured field values of gage height is shown below in figures 1 and 2.

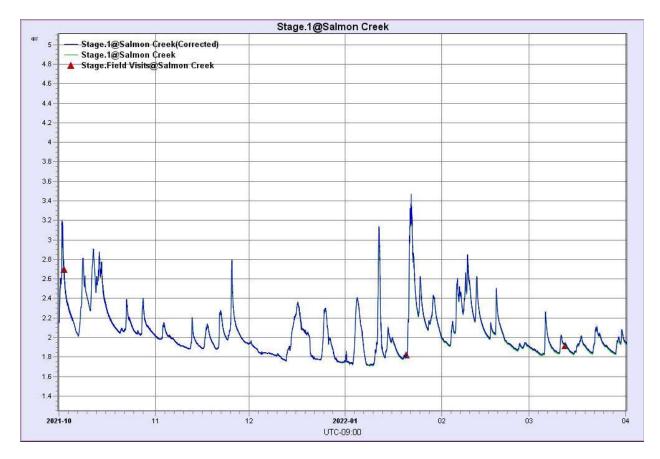


Figure 1. Stage data from Salmon Creek gaging station showing raw and corrected recorded values and field readings from the outside reference gage (Oct. 2021 to April 2022).

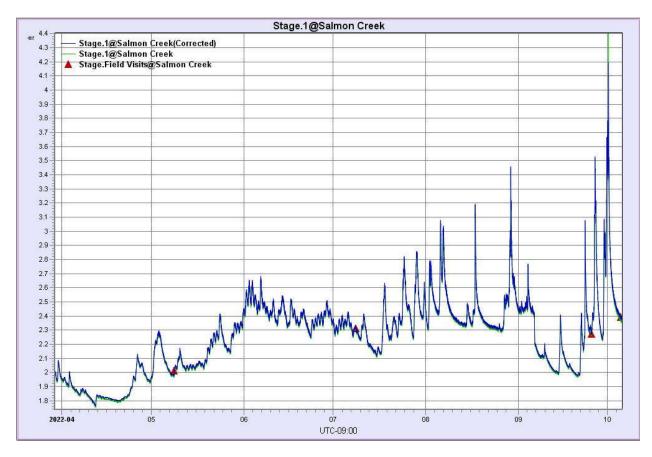


Figure 2. Stage data from Salmon Creek gaging station showing raw and corrected recorded values and field readings from the outside reference gage (April 2022 to October 2022).

DATUM CORRECTIONS.— A complete level survey was conducted on July 3, 2020. No datum corrections were needed. Additional reference marks were added and documented in the station description.

RATING.— The gage reach is under section control at low to midrange discharges and channel control at greater discharges. The gage reach is subject to scour and fill during peak flows and during salmon spawning season when salmon spawn throughout the gage reach.

Rating 3 was put into use on December 1, 2020, following a large peak that resulted in damage to the gage orifice and transducer and fill conditions throughout the gage reach Rating 3 was developed following this peak based on discharge measurements 34-40, and further verified by measurements 41-46. Rating 3 utilized historic peak discharge measurements taken by the U.S. Geological Survey to define the high end of the rating. Rating 3 suggests reduced discharge throughout the range of stage when compared to rating 2. This resulted from channel aggradation in the gage reach.

Seven discharge measurements (numbers 40-46), ranging from 11.7-150 ft³/s, were conducted since the beginning of the 2022 water year. All measurements were used in rating analysis. All measurement plotted within 4% of rating number 3. Rating curve and rating equation points for rating number 3 are shown below:



Figure 3. Salmon Creek Ratings 2 and 3. Used for computing discharge for the 2022 water year, shown in graphic and tabular formats.

DISCHARGE RECORD.— Rating number three was used direct to compute discharge for the entire 2022 water year. No shift adjustments were needed.

Discharge record was affected by ice and discharges were estimated for many days during December and January (see GAGE HEIGHT RECORD for exact dates). Discharges were estimated from discharge measurements, examination of the stage record, and comparison with Juneau weather and hydrologic records provided by the National Weather Service.

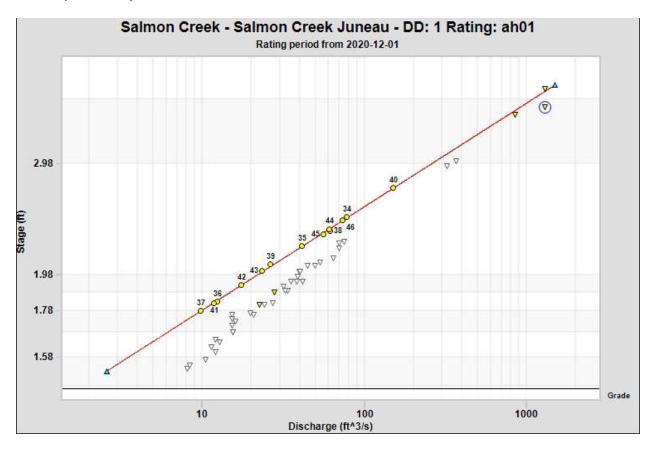



Figure 5. Salmon Creek rating number 3 (log scale) used to compute discharge from December 1, 2020, through the 2022 water year.

REMARKS.— Records of discharge are complete. Discharge records are fair to good for discharges below 300 ft³/s and poor for higher discharges due to the relatively poor gage reach and lack of cross sections available to consistently make good discharge measurements. Discharges estimated due to backwater from ice are poor. Hydrographs and tabular discharge data for the 2022 are included in the following pages.


The following .csv files were included as attachments to this document:

Salmon Creek 15 min. 2022 Final.


Salmon Creek Daily Mean 2022 WY Final.

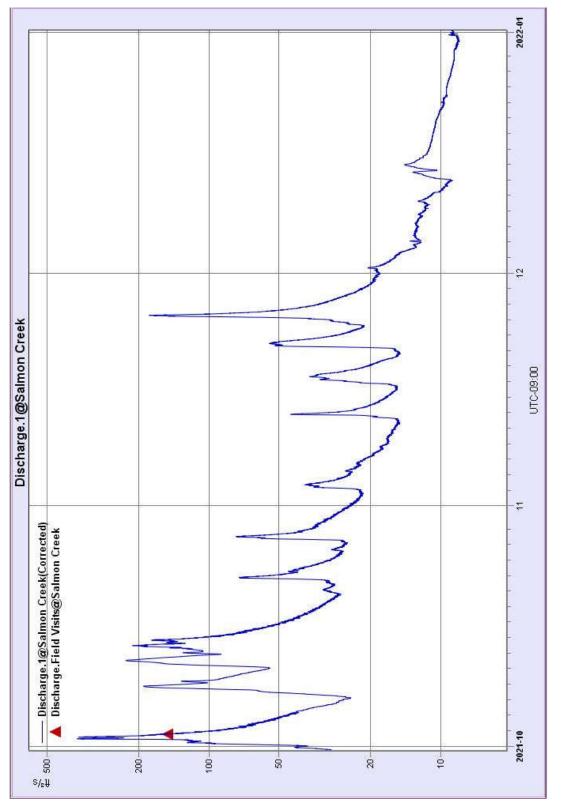




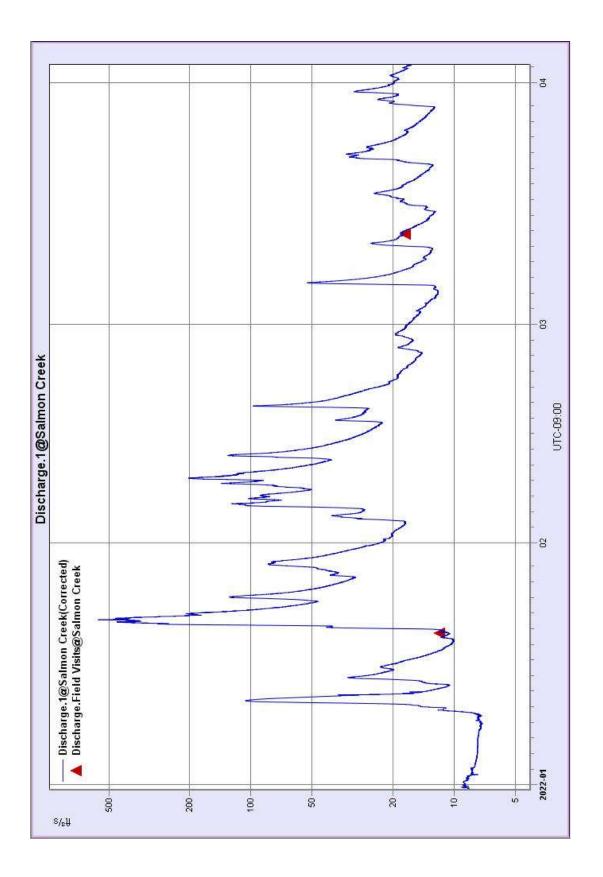



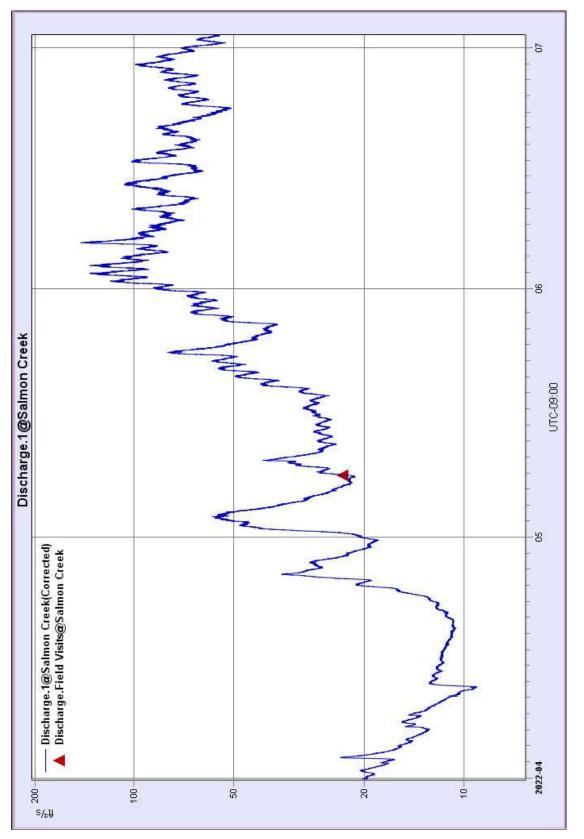



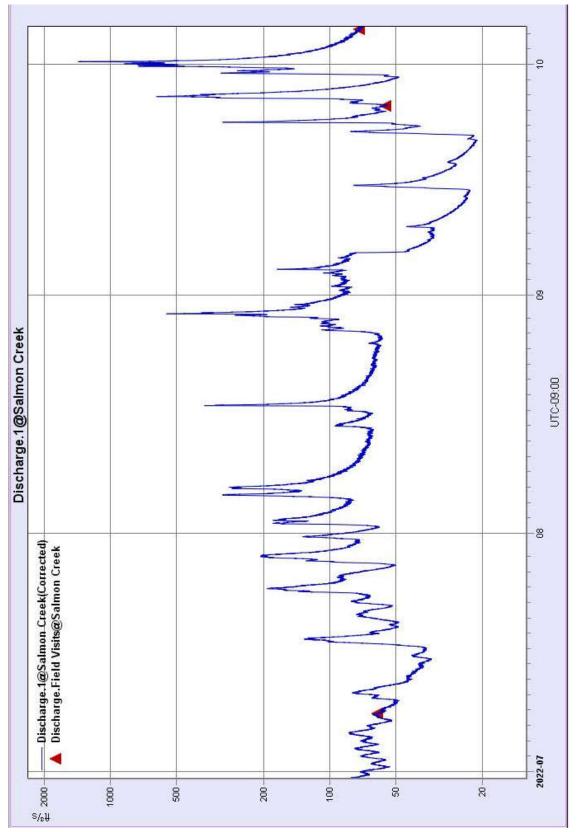



72 22 330 Sep 8 240 Aug 2 37 3 490 82 58 110 In Max: 6 2 23 Mav 7.4 16 31 31 Apr Min: 12 34 35 Mar 6 15 15 15 Aggr: Feb 7.4 4 Jan 8.9 80 8.7 8.5 8.6 11 8.5 5 De 26 35 88 Nov 2022 Water Year 26 8 tio Dav

Identifier: Discharge.Daily Mean@Salmon Creek Location: Salmon Creek Juneau

Location: Salmor Units: ft^3/s

Filter: None

Daily Mean Discharge 2022 WY Salmon Creek

APPENDIX E: AGENCY COMMENTS

[This page intentionally left blank]

AELP Email Sent to Agencies:

-			
Steve	Vord	erbru	laden

From:	Steve Vorderbruggen
Sent:	Thursday, October 20, 2022 9:04 AM
To:	sean.eagan@noaa.gov; douglass_cooper@fws.gov; benjamin.johnson@noaa.gov; Ellis, Leah M (DFG)
Subject:	AELP Salmon Creek Streamflow Report - WY2022
Attachments:	2022WY_P2307_StreamFlow_Report for Review.pdf; Salmon Creek 15 min 2022 Final.csv; Salmon Creek Daily Mean 2022 WY Final.csv
Follow Up Flag:	Follow up
Flag Status:	Flagged

Hello,

Attached is the Water Year 2022 Salmon Creek Streamflow Report for your review. Please send a response to me by Nov 21st, containing your comments or "no comments" if applicable, for inclusion in AEL&P's final report submittal to FERC.

Feel free to contact me if you have any questions.

Regards,

Steven J. Vorderbruggen, PE Generation Electrical Engineer Alaska Electric Light & Power Company 5601 Tonsgard Court Juneau, AK 99801 Phone: 907.463.6396



Email Responses:

No responses received from NMFS or USFWS.

The response from ADFG is below.

From: Ellis, Leah M (DFG) <leah.ellis@alaska.gov> Sent: Friday, October 21, 2022 10:09 AM To: Steve Vorderbruggen <Steve.Vorderbruggen@aelp.com> Subject: ** EXTERNAL ** RE: AELP Salmon Creek Streamflow Report - WY2022

Hi Steve,

Thank you for the opportunity to review the Stream Flow Monitoring Report for Salmon Creek for water year 2022. Alaska Department of Fish & Game has reviewed the report and has no comments.

I appreciate the level of detail in this report and AEL&P's adherence to USGS standards for the operation and maintenance of the streamgage. Keep up the good work.

Cheers, Leah

Leah M. Ellis FERC Hydropower Coordinator, Instream Flow Program Alaska Department of Fish & Game Anchorage, AK

(907) 267-2404 Leah.ellis@alaska.gov